



# Actinic BL TL(-K) / TL-D(-K)

## Actinic BL TL MINI 4W/10

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data


General Information		Approval and Application	
Cap-Base	G5 [ G5]	Mercury (Hg) Content (Nom)	4.4 mg
Life to 50% Failures (Nom)	8000 h		
Useful Life (Max)	5000 h		
Light Technical		UV	
Color Code	10	UV-B/UV-A (IEC)	0.2 %
Color Designation	Actinic		
UV Depreciation at 1000 h	25 %	Product Data	
UV Depreciation at 2000 h	35 %	Full product code	871150095142727
UV Depreciation at 5000 h	17 %	Order product name	Actinic BL TL MINI 4W/10
Operating and Electrical		EAN/UPC - Product	8711500951427
Power (Rated) (Nom)	4.5 W	Order code	928000001030
Lamp Current (Nom)	0.17 A	Numerator - Quantity Per Pack	1
Voltage (Nom)	29 V	Numerator - Packs per outer box	250
		Material Nr. (12NC)	928000001030
		Net Weight (Piece)	18.600 g

## Actinic BL TL(-K) / TL-D(-K)

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing

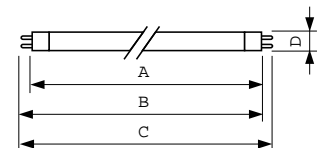


Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL MINI 4W/10	16 mm	135.9 mm	143 mm	140.6 mm	150.1 mm

TL 4W/10

### Photometric data

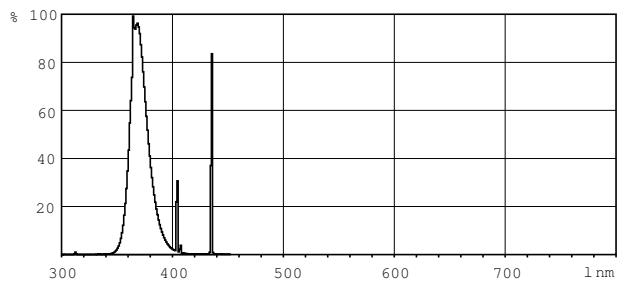

Lightcolor /10

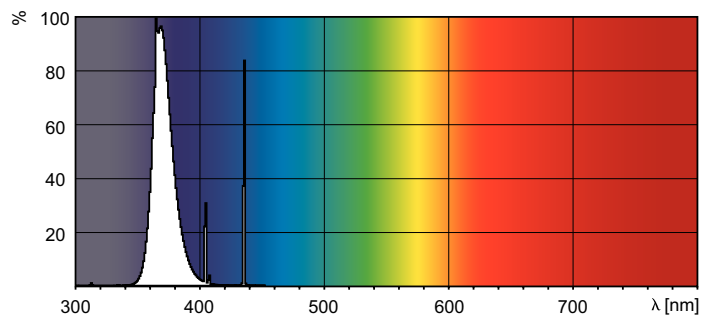

Lightcolor /10

