



# Actinic BL TL(-K) / TL-D(-K)

## Actinic BL TL 8W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data


General Information		Voltage (Nom)	
Cap-Base	G5 [ G5]	56 V	
Main Application	Reprography (R)	Approval and Application	
Life to 50% Failures (Nom)	10000 h	Mercury (Hg) Content (Nom)	4.4 mg
Useful Life (Nom)	5000 h	UV	
Light Technical		UV-B/UV-A (IEC)	0.2 %
Color Code	10	UV-A Radiation 100Hr (IEC)	1.60 W
Color Designation	Actinic	Product Data	
Chromaticity Coordinate X (Nom)	222	Full product code	871150026042027
Chromaticity Coordinate Y (Nom)	210	Order product name	Actinic BL TL 8W/10 1FM/10X25CC
UV Depreciation at 500 h	17 %	EAN/UPC - Product	8711500260420
UV Depreciation at 1000 h	25 %	Order code	928001001030
UV Depreciation at 2000 h	35 %	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	250
Power (Rated) (Nom)	7.1 W	Material Nr. (12NC)	928001001030
Lamp Current (Nom)	0.145 A	Net Weight (Piece)	25.300 g

## Actinic BL TL(-K) / TL-D(-K)

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



### Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 8W/10 1FM/ 10X25CC	16 mm	288.3 mm	295.4 mm	293 mm	302.5 mm

### TL 8W/10

### Photometric data

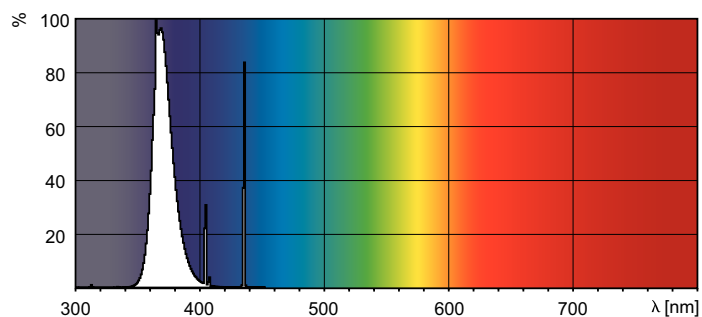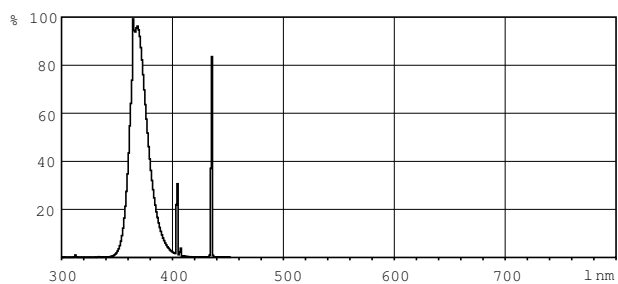

### Lightcolor /10

### Lightcolor /10

