



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL MINI 15W/10 /10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data


| General Information | | UV | |
|---------------------------|----------|---------------------------------|------------------------------------|
| Cap-Base | G5 [G5] | UV-B/UV-A (IEC) | 0.2 % |
| Useful Life (Max) | 1000 h | UV-A Radiation 100Hr (IEC) | 3 W |
| Light Technical | | Product Data | |
| Color Code | 10 | Full product code | 871150095148927 |
| Color Designation | Actinic | Order product name | Actinic BL TL MINI 15W/10 /10X25CC |
| UV Depreciation at 500 h | 30 % | EAN/UPC - Product | 8711500951489 |
| UV Depreciation at 1000 h | 40 % | Order code | 928001201030 |
| UV Depreciation at 2000 h | 45 % | Numerator - Quantity Per Pack | 1 |
| Operating and Electrical | | Numerator - Packs per outer box | 250 |
| Power (Rated) (Nom) | 15 W | Material Nr. (12NC) | 928001201030 |
| Lamp Current (Nom) | 0.40 A | Net Weight (Piece) | 25.300 g |
| Voltage (Nom) | 43 V | | |

Actinic BL TL(-K) / TL-D(-K)

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|--------------------|---------|----------|----------|----------|----------|
| Actinic BL TL MINI | 16 mm | 288.3 mm | 295.4 mm | 293.0 mm | 302.5 mm |
| 15W/10 /10X25CC | | | | | |

TL 15W/10

Photometric data

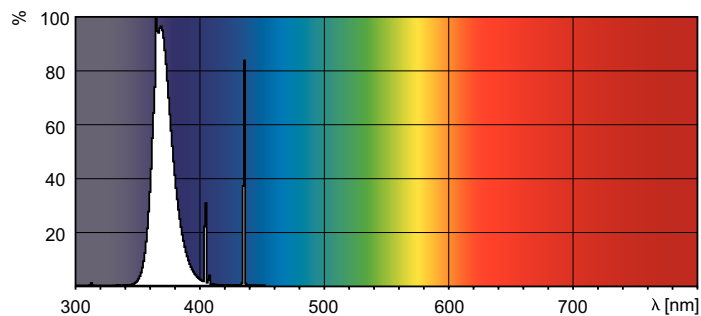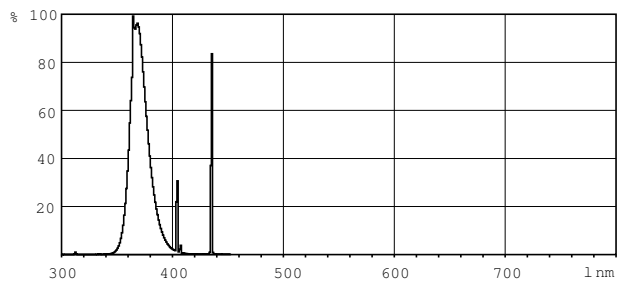

Lightcolor /10

Lightcolor /10

