



CDM

CDM-SA/R 150W/942 UNP/1

The perfect color rendering and long life of these Ceramic Discharge Metal-halide lamps make them ideal for fiber optics lighting systems in shop displays, decorative lighting and swimming pool illumination. They can be mounted in color changing projectors.

Product data


GeniPubl	
CERAMICCAP-CABLE Ceramic Cap-Cable (C)	CERAMICCAP-CABLE [Ceramic Cap-Cable (C)]
UNIVERSAL Any or Universal (U)	UNIVERSAL [Any or Universal (U)]
Fiber Optics	Fiber Optics
6000 h	6000 h
LittPubl	
942 CCT of 4200K	942 [CCT of 4200K]
2200 lm	2200 lm
2650 lm	2650 lm
Cool White (CW)	Cool White (CW)
366	366
353	353
4200 K	4200 K
16.5 lm/W	16.5 lm/W
96	96
ElecPubl	
159 W	159 W
1.76 A	1.76 A
198 V	198 V

CntrPubl	
No	No
MechPubl	
Cable 250 mm	Cable 250 mm
LDRPubl	
650 °C	650 °C
350 °C	350 °C
ProductPubl	
871150020150800	871150020150800
CDM-SA/R 150W/942 UNP/1	CDM-SA/R 150W/942 UNP/1
8727900783490	8727900783490
928086805303	928086805303
1	1
1	1
928086805303	928086805303
0.192 kg	0.192 kg

CDM

Warnings and Safety

Dimensional drawing





CDM-SA/R 150W/942

Product

CDM-SA/R 150W/942 UNP/1

Photometric data

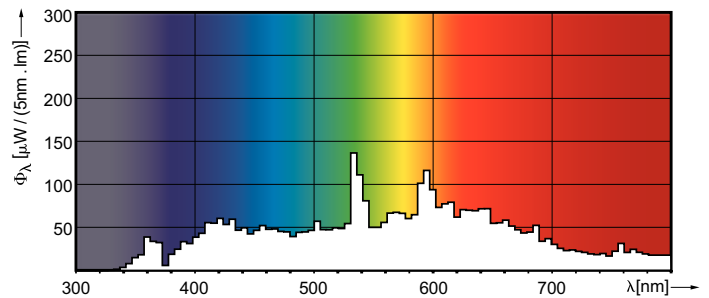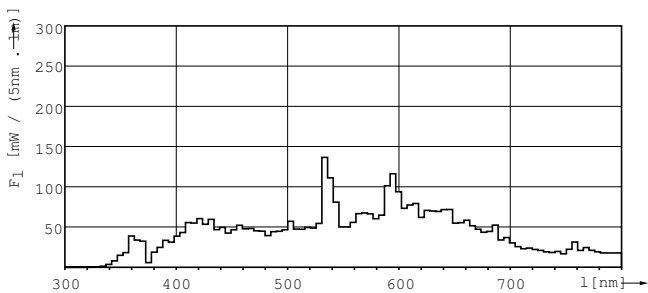

XDPO_XDCDMSAR_942-Spectral power distribution Colour

