

# MSD Platinum (Touring/Stage)

# MSD Platinum 21 R UNP/24

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

### **Product data**

General Information			
Cap-Base	-[-]		
Operating Position	UNIVERSAL [ Any or Universal (U)]		
Main Application	Stage/Touring		
Life to 50% Failures (Nom)	1500 h		
System Description	Reflector-E21.4		
Light Technical			
Color Code	2		
Luminous Flux (Min)	14100 lm		
Luminous Flux (Nom)	15600 lm		
Chromaticity Coordinate X (Max)	312		
Chromaticity Coordinate X (Min)	282		
Chromaticity Coordinate X (Nom)	297		
Chromaticity Coordinate Y (Max)	315		
Chromaticity Coordinate Y (Min)	285		
Chromaticity Coordinate Y (Nom)	300		
Correlated Color Temperature (Nom)	8000 K		

Luminous Efficacy (rated) (Nom)	33 lm/W		
Color Rendering Index (Nom)	-		
Operating and Electrical			
Power (Nom)	470 W		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Cap-Base Information	-		
Luminaire Design Requirements			
Bulb Temperature (Max)	900 ℃		
Pinch Temperature (Max)	350 °C		
Product Data			
Full product code	871869667832900		

Datasheet, 2018, July 23 data subject to change


# MSD Platinum (Touring/Stage)

Order product name	MSD Platinum 21 R UNP/24		
EAN/UPC - Product	8718696678329		
Order code	928197805308		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	24		

Material Nr. (12NC)	928197805308	
Net Weight (Piece)	110.000 g	


## **Warnings and Safety**


# Dimensional drawing



Product	D (max)	0	C (max)
MSD Platinum 21 R UNP/24	54 mm	1.2 mm	60 mm

### Photometric data

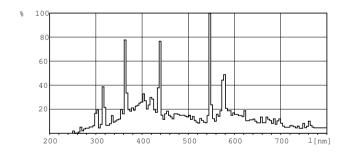

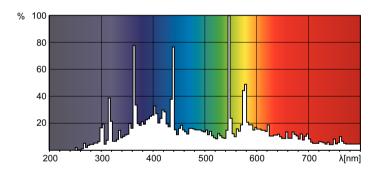



© 2018 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.