



MSR Hot Restrike

MSR 2500 HR 1CT/2

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data


General Information	
Cap-Base	G38 [G38]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Indoor & Outdoor filming
Life to 50% Failures (Nom)	500 h
System Description	Hot Restrike
Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	207900 lm
Luminous Flux (Nom)	231000 lm
Chromaticity Coordinate X (Nom)	325
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	83 lm/W
Luminous Efficacy (rated) (Nom)	92 lm/W
Color Rendering Index (Nom)	95
Operating and Electrical	
Power (Nom)	2500 W
Lamp Current (Nom)	24.4 A

Ignition Supply Voltage (Min)	207 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	-
Luminaire Design Requirements	
Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	450 °C
Product Data	
Full product code	872790092604000
Order product name	MSR 2500 HR 1CT/2
EAN/UPC - Product	8727900926040
Order code	928104905114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	928104905114
Net Weight (Piece)	0.305 kg

MSR Hot Restrike

Warnings and Safety



Dimensional drawing



MSR 2500 HR

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 2500	60 mm	14.0	126	128 mm	127	240	67 mm	65	63 mm
HR 1CT/2		mm	mm		mm	mm		mm	

Photometric data

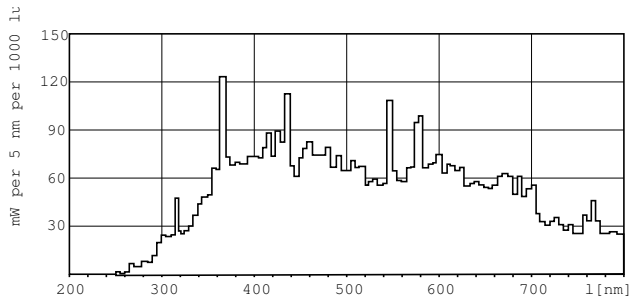

XDPO_XDMSR_HR--Spectral power distribution Colour

