



# MSR

## MSR 700 1CT/8

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

### Product data


General Information	
Cap-Base	G22 [ G22]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Studio/Disco
Life to 50% Failures (Nom)	1000 h
System Description	-
Light Technical	
Color Code	- [ Not Specified]
Luminous Flux (Min)	48000 lm
Luminous Flux (Nom)	55000 lm
Chromaticity Coordinate X (Nom)	325
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	5900 K
Luminous Efficacy (rated) (Nom)	80 lm/W
Color Rendering Index (Nom)	75
Operating and Electrical	
Power (Nom)	700 W
Lamp Current (Nom)	12 A

Ignition Supply Voltage (Min)	207 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	-
Luminaire Design Requirements	
Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	872790091575400
Order product name	MSR 700 1CT/8
EAN/UPC - Product	8727900915754
Order code	928078005114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928078005114

Net Weight (Piece)	0.120 kg
--------------------	----------

Warnings and Safety



Dimensional drawing



MSR 700

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR 700 1CT/8	30 mm	8.0 mm	74 mm	76 mm	75 mm	152 mm	42 mm

Photometric data

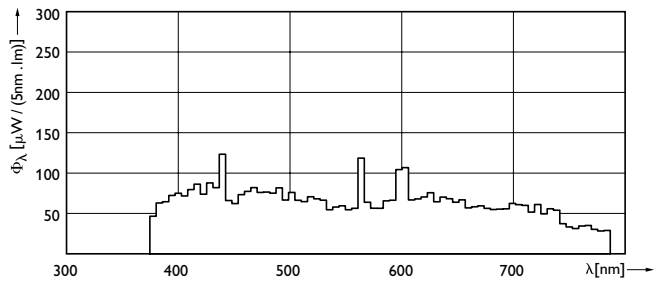

XDPO\_XDMSR\_700\_--Spectral power distribution Colour

