



# MSR Gold™ SA Double Ended

## MSR Gold™ 1200 SA/DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Product data

General Information	
Cap-Base	SFC10-4 [ SFC10-4]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Entertainment
Life to 50% Failures (Nom)	750 h
System Description	SA/DE
Light Technical	
Color Code	- [ Not Specified]
Luminous Flux (Min)	92700 lm
Luminous Flux (Nom)	103000 lm
Chromaticity Coordinate X (Nom)	326
Chromaticity Coordinate Y (Nom)	332
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	77 lm/W
Luminous Efficacy (rated) (Nom)	86 lm/W
Color Rendering Index (Nom)	85

Operating and Electrical	
Power (Rated) (Nom)	1200 W
Lamp Current (Nom)	13.6 A
Ignition Supply Voltage (Min)	198 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	SFC10-4
Product Data	
Full product code	871829122121000
Order product name	MSR Gold™ 1200 SA/DE 1CT/4
EAN/UPC - Product	8718291221210
Order code	928099605115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

# MSR Gold™ SA Double Ended

Material Nr. (12NC)	928099605115
Net Weight (Piece)	34.000 g

## Warnings and Safety



- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 1200 SA/DE 1CT/4	22 mm	7.0 mm	114.4 mm	115.2 mm	114.8 mm	136 mm

### MSR GOLD 1200 SA/DE

## Photometric data

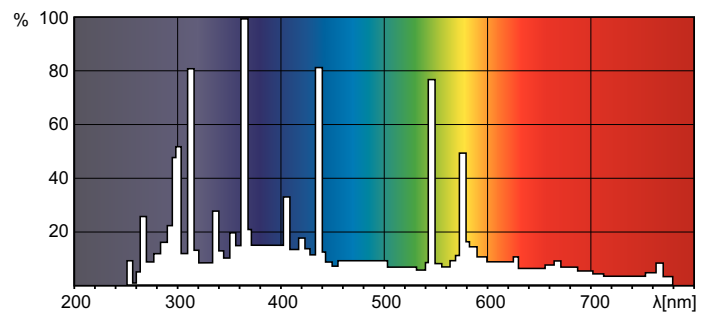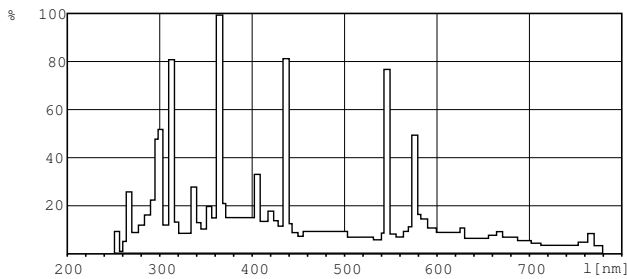

### MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

### MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

