

PHILIPS

Lighting



MSR Gold™ SA Double Ended

MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Product data

General Information		Operating and Electrical	
Cap-Base	SFC-11 [SFC-11]	Power (Nom)	575 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Lamp Current (Nom)	7 A
Main Application	Entertainment	Ignition Supply Voltage (Min)	198 V
Life to 50% Failures (Nom)	750 h	Controls and Dimming	
System Description	SA/2 DE	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	2	Cap-Base Information	SFC-11
Luminous Flux (Min)	39000 lm	Luminaire Design Requirements	
Luminous Flux (Nom)	42000 lm	Pinch Temperature (Max)	400 °C
Chromaticity Coordinate X (Nom)	294	Product Data	
Chromaticity Coordinate Y (Nom)	317	Full product code	872790091464100
Correlated Color Temperature (Nom)	7500 K	Order product name	MSR Gold™ 575 SA/2 DE 1CT/40
Luminous Efficacy (rated) (Nom)	73 lm/W	EAN/UPC - Product	8727900914641
Color Rendering Index (Nom)	75		


MSR Gold™ SA Double Ended

Order code	928175105114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	928175105114

Net Weight (Piece)	0.032 kg
--------------------	----------

Warnings and Safety


Dimensional drawing

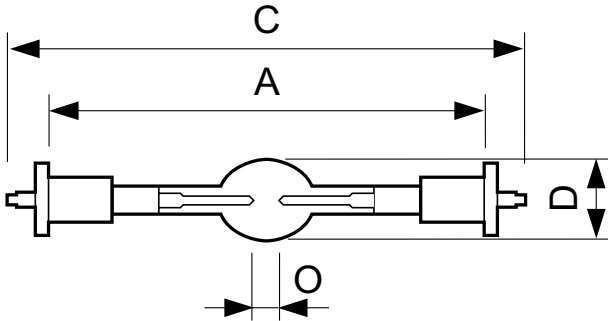

MSR GOLD 575 SA/2 DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 575 SA/2 DE 1CT/40	18.5 mm	5.0 mm	69.6 mm	70.4 mm	70 mm	92 mm

Photometric data



XDPB_XDMSR_575W_SA2-DE-Spectral power distribution B/W

