



# Actinic BL PL-S/PL-L

## PL-S 11W/10/2P 1CT/6X10BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data

General Information	
Cap-Base	G23 [ G23]
Life to 50% Failures (Nom)	8000 h
Useful Life (Nom)	2000 h
Light Technical	
Color Code	210 [ leadfree 360 glass (10)]
Color Designation	Ultra Violet A
Chromaticity Coordinate X (Nom)	227
Chromaticity Coordinate Y (Nom)	212
UV Depreciation at 2000 h	15 %
UV Depreciation at 5000 h	30 %
Operating and Electrical	
Power (Rated) (Nom)	11.6 W
Lamp Current (Nom)	0.16 A
Voltage (Nom)	89 V


Mechanical and Housing	
Cap-Base Information	2 Pins
UV	
UV-A Radiation 100Hr (IEC)	2.81 W
Product Data	
Full product code	871150095201180
Order product name	PL-S 11W/10/2P 1CT/6X10BOX
EAN/UPC - Product	8711500952011
Order code	927902321007
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	60
Material Nr. (12NC)	927902321007
Net Weight (Piece)	43.000 g

## Actinic BL PL-S/PL-L

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing




Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
PL-S 11W/10/2P 1CT/ 6X10BOX	13 mm	28 mm	198 mm	213.3 mm	236.3 mm

PL-S 11W/210/2P

### Photometric data

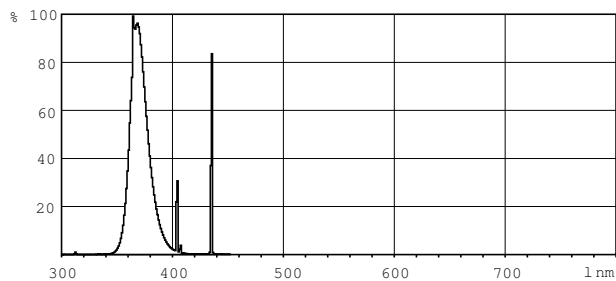

Lightcolor /10, /110 & /210

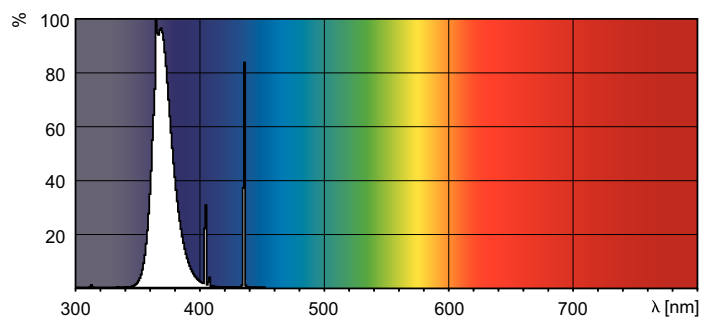

Lightcolor /10, /110 & /210

