

**PHILIPS****Lighting**

# **Actinic BL TL-D(K) Secura**

## **Actinic BL TL-D TL 8W/10 Secura 1FM/10X25CC**

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

### **Product data**


<b>General Information</b>		<b>Approval and Application</b>	
Cap-Base	G5 [ G5]	Mercury (Hg) Content (Nom)	4.4 mg
Life to 50% Failures (Nom)	10000 h		
Useful Life (Max)	3000 h		
<b>Light Technical</b>			<b>UV</b>
Color Code	10	UV-B/UV-A (IEC)	0.2 %
UV Depreciation at 500 h	17 %	UV-A Radiation 100Hr (IEC)	1.6 W
UV Depreciation at 1000 h	25 %		
UV Depreciation at 2000 h	35 %		
<b>Operating and Electrical</b>			<b>Product Data</b>
Power (Rated) (Nom)	7.1 W	Full product code	871829168010900
Lamp Current (Nom)	0.145 A	Order product name	Actinic BL TL-D TL 8W/10 Secura 1FM/10X25CC
Voltage (Nom)	56 V	EAN/UPC - Product	8718291680109
		Order code	928011001029
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	250
		Material Nr. (12NC)	928011001029
		Net Weight (Piece)	25.300 g

## Actinic BL TL-D(K) Secura

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



### Dimensional drawing

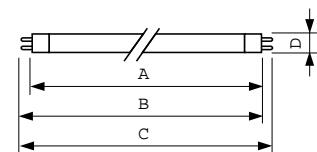

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D TL 8W/10	16 mm	288.3 mm	295.4 mm	293.0 mm	302.5 mm
Secura 1FM/10X25CC					

TL 8W/10 Secura

### Photometric data

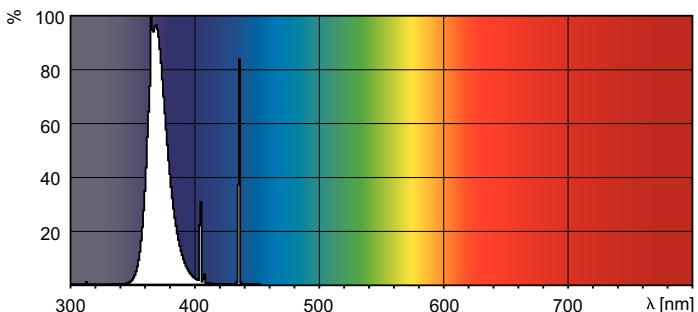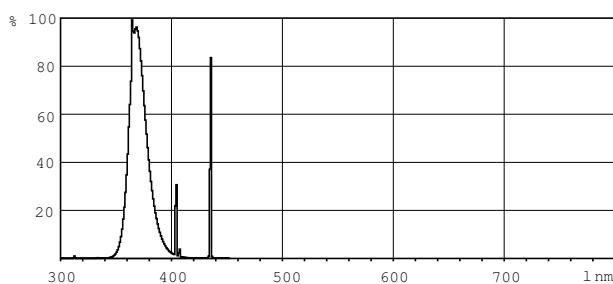

Lightcolor /10

Lightcolor /10

